




# Dialight LED SafeSite<sup>®</sup> Bulkhead

Technical Specification Sheet - INMETRO





# SafeSite® LED Bulkhead

## 100-277 VAC Model

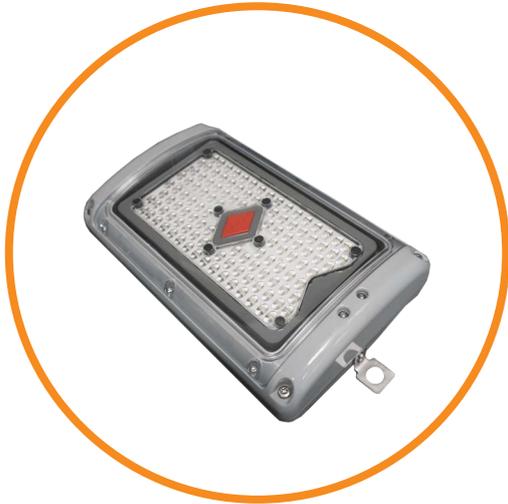

### Certifications & Ratings

- 10 year warranty
- INMETRO Zone 1, 21
  - Ex eb mb IIC T4 Gb
  - EX tb IIIC T130°C Db
- INMETRO Zone 2, 22
  - Ex ec IIC T4 Gc
  - Ex tc IIIC T130°C Dc
- Ta = -40°C to +65°C for standard models
- Ta = -20°C to +55°C for battery backup models
- IP66/67
- IK10

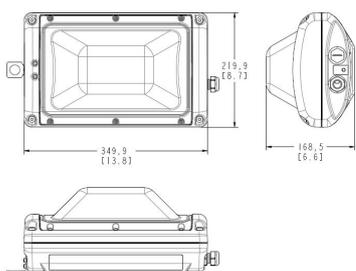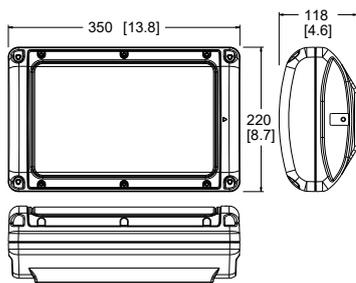

Dimensions in mm (inches)

**WARNING - INSTALLATION & SECONDARY RETENTION.** Use of any Dialight products without proper installation (including secondary retention / netting) and periodic inspections could cause severe injury or death. Dialight recommends that all installations should use secondary retention / netting (appropriate to the installation environment) where applicable. It is the exclusive responsibility of the contractor, installer and/or end-user to: (a) determine the suitability of the product for its intended application; and, (b) ensure that the product is safely installed (with secondary retention / netting where appropriate) and in compliance with all applicable laws and regulations. To the extent permissible under applicable laws, Dialight disclaims all liability for personal injury and/or other damage resulting from any dislodgment or other dislocation of its products.

### Mechanical Information:

<b>Fixture weights:</b>	
Standard models:	6.8 kg (15.0 lb)
Battery backup models:	7.7 kg (17 lb)
<b>Shipping weights:</b>	
Standard models:	7.3 kg (16.1 lb)
Battery backup models:	8.4 kg (18.5 lb)
<b>Cable entry:</b>	(2) M20 - optional (4) M20

### Materials:

<b>Housing:</b>	A360 Die-cast aluminium
<b>Finish:</b>	Superior dual coat finish - Sealed polyester topcoat - Epoxy primer
<b>Lens:</b>	Polycarbonate clear Polycarbonate diffused (optional) Polycarbonate domed diffused
<b>Hardware:</b>	316 Stainless Steel

### Electrical Specifications:

<b>Operating voltage:</b>	
Standard models:	100-277 VAC / 120-250 VDC
Battery backup models:	110/120 VAC, 230/240 VAC
<b>Operating temperature:</b>	
Standard models:	-40°C to +65°C (-40°F to +149°F)
Battery backup models:	-20°C to +55°C (-4°F to +131°F)
<b>Surge protection:</b>	6kV/3kA, 1.2/50, 8/20us Combination Wave Line-line and line-ground
<b>THD:</b>	< 18%
<b>Power factor:</b>	> 0.9
<b>Dimming:</b>	DALI 1.0 and 2.0 0-10 VDC continuous dimming to <10%

### Battery Backup Models: (integral battery)

<b>Battery duration* (circular optic, clear lens):</b>	
6.5k lumen outputs:	180 mins ~ 900 lm 90 mins ~ 1100 lm 60 mins ~ 1140 lm
3k lumen outputs:	180 mins ~ 800 lm 90 mins ~ 1100 lm 60 mins ~ 1140 lm

**Expected battery life:** 4 years

### Photometric Information:

<b>Lumen output*:</b>	3,000 & 6,500 lm (white light)
<b>CRI:</b>	> 80 (white light)
<b>CCT:</b>	5000K (cool white) 4000K (neutral white) 2700K (warm white) Amber Green

All values typical unless otherwise stated (tolerance +/- 10%)  
\* @ 25°C ambient

## Ordering Information

### SafeSite® LED Bulkhead



#### Zone 1, 21

Part Number	Fixture Lumens	Wattage	lm/W	Voltage	CCT	Lens	Beam Distribution
<b>Standard Models with Flush Bracket</b>							
BHK-4BC2-3NFN-VGN	3,300	22	153	100-277VAC / 120-250VDC	5000K (cool white)	Clear Polycarbonate	Circular
BHK-4BC2-6NFN-VGN	6,200	45	138	100-277VAC / 120-250VDC	5000K (cool white)	Clear Polycarbonate	Circular
BHK-4UC2-3NFN-VGN	3,100	22	144	100-277VAC / 120-250VDC	5000K (cool white)	Clear Polycarbonate	Ultra-Wide (Type 1)
BHK-4UC2-6NFN-VGN	6,200	45	138	100-277VAC / 120-250VDC	5000K (cool white)	Clear Polycarbonate	Ultra-Wide (Type 1)
<b>BHK-4BN2-3NFN-VGN</b>	3,300	22	153	100-277VAC / 120-250VDC	4000K (neutral white)	Clear Polycarbonate	Circular
<b>BHK-4BN2-6NFN-VGN</b>	6,200	45	138	100-277VAC / 120-250VDC	4000K (neutral white)	Clear Polycarbonate	Circular
BHK-4UN2-3NFN-VGN	3,100	22	144	100-277VAC / 120-250VDC	4000K (neutral white)	Clear Polycarbonate	Ultra-Wide (Type 1)
BHK-4UN2-6NFN-VGN	6,200	45	138	100-277VAC / 120-250VDC	4000K (neutral white)	Clear Polycarbonate	Ultra-Wide (Type 1)
BHK-4BA2-5NFN-VGN	4,200	46	91	100-277VAC / 120-250VDC	Amber	Clear Polycarbonate	Circular
<b>Battery Backup Models with Flush Bracket</b>							
BHK-4BCG-3NFN-VGF	3,300	25	132	230-240VAC	5000K (cool white)	Clear Polycarbonate	Circular
BHK-4BCG-6NFN-VGF	6,200	48	129	230-240VAC	5000K (cool white)	Clear Polycarbonate	Circular
BHK-4UCG-3NFN-VGF	3,100	25	124	230-240VAC	5000K (cool white)	Clear Polycarbonate	Ultra-Wide (Type 1)
BHK-4UCG-6NFN-VGF	6,200	48	129	230-240VAC	5000K (cool white)	Clear Polycarbonate	Ultra-Wide (Type 1)
<b>BHK-4BNG-3NFN-VGF</b>	3,300	25	132	230-240VAC	4000K (neutral white)	Clear Polycarbonate	Circular
<b>BHK-4BNG-6NFN-VGF</b>	6,200	48	129	230-240VAC	4000K (neutral white)	Clear Polycarbonate	Circular
BHK-4UNG-3NFN-VGF	3,100	25	124	230-240VAC	4000K (neutral white)	Clear Polycarbonate	Ultra-Wide (Type 1)
BHK-4UNG-6NFN-VGF	6,200	48	129	230-240VAC	4000K (neutral white)	Clear Polycarbonate	Ultra-Wide (Type 1)
BHK-4BAG-5NFN-VGF	4,200	49	86	230-240VAC	Amber	Clear Polycarbonate	Circular
<b>BHK-6BGG-3NFN-VGG</b>	2,600	33	79	230-240VAC	Green	Domed Diffused	Circular

#### Zone 2, 22

Part Number	Fixture Lumens	Wattage	lm/W	Voltage	CCT	Lens	Beam Distribution
<b>Standard Models with Flush Bracket</b>							
BHL-4BC2-3NFN-VGN	3,200	22	149	100-277VAC / 120-250VDC	5000K (cool white)	Clear Polycarbonate	Circular
BHL-4BC2-6NFN-VGN	6,700	45	149	100-277VAC / 120-250VDC	5000K (cool white)	Clear Polycarbonate	Circular
BHL-4UC2-3NFN-VGN	3,100	22	144	100-277VAC / 120-250VDC	5000K (cool white)	Clear Polycarbonate	Ultra-Wide (Type 1)
BHL-4UC2-6NFN-VGN	6,400	45	142	100-277VAC / 120-250VDC	5000K (cool white)	Clear Polycarbonate	Ultra-Wide (Type 1)
<b>BHL-4BN2-3NFN-VGN</b>	3,200	22	149	100-277VAC / 120-250VDC	4000K (neutral white)	Clear Polycarbonate	Circular
<b>BHL-4BN2-6NFN-VGN</b>	6,700	45	149	100-277VAC / 120-250VDC	4000K (neutral white)	Clear Polycarbonate	Circular
BHL-4UN2-3NFN-VGN	3,100	22	144	100-277VAC / 120-250VDC	4000K (neutral white)	Clear Polycarbonate	Ultra-Wide (Type 1)
BHL-4UN2-6NFN-VGN	6,400	45	142	100-277VAC / 120-250VDC	4000K (neutral white)	Clear Polycarbonate	Ultra-Wide (Type 1)
BHL-4BA2-5NFN-VGN	4,200	46	91	100-277VAC / 120-250VDC	Amber	Clear Polycarbonate	Circular
<b>Battery Backup Models with Flush Bracket</b>							
BHL-4BCG-3NFN-VGF	3,200	25	128	230-240VAC	5000K (cool white)	Clear Polycarbonate	Circular
BHL-4BCG-6NFN-VGF	6,700	48	140	230-240VAC	5000K (cool white)	Clear Polycarbonate	Circular
BHL-4UCG-3NFN-VGF	3,100	25	124	230-240VAC	5000K (cool white)	Clear Polycarbonate	Ultra-Wide (Type 1)
BHL-4UCG-6NFN-VGF	6,400	48	133	230-240VAC	5000K (cool white)	Clear Polycarbonate	Ultra-Wide (Type 1)
<b>BHL-4BNG-3NFN-VGF</b>	3,200	25	128	230-240VAC	4000K (neutral white)	Clear Polycarbonate	Circular
<b>BHL-4BNG-6NFN-VGF</b>	6,700	48	140	230-240VAC	4000K (neutral white)	Clear Polycarbonate	Circular
BHL-4UNG-3NFN-VGF	3,100	25	124	230-240VAC	4000K (neutral white)	Clear Polycarbonate	Ultra-Wide (Type 1)
BHL-4UNG-6NFN-VGF	6,400	48	133	230-240VAC	4000K (neutral white)	Clear Polycarbonate	Ultra-Wide (Type 1)
BHL-4BAG-5NFN-VGF	4,200	49	86	230-240VAC	Amber	Clear Polycarbonate	Circular
<b>BHL-6BGG-3NFN-VGG</b>	2,600	33	79	230-240VAC	Green	Domed Diffused	Circular


All values typical unless otherwise stated (tolerance +/- 10%).  
 2700k models available on request  
 INMETRO models are indicated by 3rd character 'K' or 'L'

## SafeSite® LED Bulkhead Pole Mount Model



### Certifications & Ratings

- 10 year warranty
- INMETRO Zone 1, 21
  - Ex eb mb IIC T4 Gb
  - EX tb IIIC T130°C Db
- INMETRO Zone 2, 22
  - Ex ec IIC T4 Gc
  - Ex tc IIIC T130°C Dc
- Ta = -40°C to +65°C for standard models
- Ta = -20°C to +55°C for battery backup model
- IP66/67
- IK10

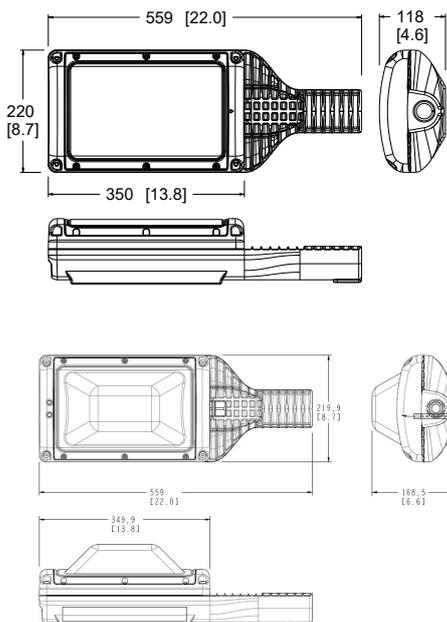

Dimensions in mm (inches)

### Mechanical Information:

<b>Fixture weights:</b>	
Standard models:	7.9 kg (17.4 lb)
Battery backup models:	8.8 kg (19.4 lb)
<b>Shipping weights:</b>	
Standard models:	8.4 kg (18.5 lb)
Battery backup models:	9.3 kg (20.5 lb)
<b>Cable entry:</b>	(1) M25
<b>Spigot entry size:</b>	35mm ID Optional 44mm ID

### Materials:

<b>Housing:</b>	A360 Die-cast aluminium
<b>Finish:</b>	Superior dual coat finish - Sealed polyester topcoat - Epoxy primer
<b>Lens:</b>	Polycarbonate clear Polycarbonate diffused (optional) Polycarbonate domed diffused
<b>Hardware:</b>	316 Stainless Steel

### Electrical Specifications:

<b>Operating voltage:</b>	
Standard models:	100-277 VAC / 120-250 VDC
Battery backup models:	110/120 VAC, 230/240 VAC
<b>Operating temperature:</b>	
Standard models:	-40°C to +65°C (-40°F to +149°F)
Battery backup models:	-20°C to +55°C (-4°F to +131°F)
<b>Surge protection:</b>	6kV/3kA, 1.2/50, 8/20us Combination Wave Line-line and line-ground
<b>THD:</b>	< 18%
<b>Power factor:</b>	> 0.9
<b>Dimming:</b>	DALI 1.0 and 2.0 0-10 VDC continuous dimming to <10%

### Battery Backup Models: (integral battery)

#### Battery duration\* (circular optic, clear lens):

6.5k lumen outputs:	180 mins ~ 900 lm 90 mins ~ 1100 lm 60 mins ~ 1140 lm
3k lumen outputs:	180 mins ~ 800 lm 90 mins ~ 1100 lm 60 mins ~ 1140 lm

**Expected battery life:** 4 years

### Photometric Information:

<b>Lumen output*:</b>	3,000 & 6,500 lm (white light)
<b>CRI:</b>	> 80 (white light)
<b>CCT:</b>	5000K (cool white) 4000K (neutral white) 2700K (warm white) Amber Green

All values typical unless otherwise stated (tolerance +/- 10%)  
\* @ 25°C ambient

**WARNING - INSTALLATION & SECONDARY RETENTION.** Use of any Dialight products without proper installation (including secondary retention / netting) and periodic inspections could cause severe injury or death. Dialight recommends that all installations should use secondary retention / netting (appropriate to the installation environment) where applicable. It is the exclusive responsibility of the contractor, installer and/or end-user to: (a) determine the suitability of the product for its intended application; and, (b) ensure that the product is safely installed (with secondary retention / netting where appropriate) and in compliance with all applicable laws and regulations. To the extent permissible under applicable laws, Dialight disclaims all liability for personal injury and/or other damage resulting from any dislodgment or other dislocation of its products.

## Ordering Information

### SafeSite® LED Bulkhead - Pole Mount

#### Zone 1, 21




Part Number	Fixture Lumens	Wattage	lm/W	Voltage	CCT	Lens	Beam Distribution
<b>Pole Mount Models</b>							
BPK-4BC2-3NNN-VGN	3,300	22	153	100-277VAC / 120-250VDC	5000K (cool white)	Clear Polycarbonate	Circular
BPK-4BC2-6NNN-VGN	6,200	45	138	100-277VAC / 120-250VDC	5000K (cool white)	Clear Polycarbonate	Circular
BPK-4UC2-3NNN-VGN	3,100	22	144	100-277VAC / 120-250VDC	5000K (cool white)	Clear Polycarbonate	Ultra-Wide (Type 1)
BPK-4UC2-6NNN-VGN	6,200	45	138	100-277VAC / 120-250VDC	5000K (cool white)	Clear Polycarbonate	Ultra-Wide (Type 1)
BPK-4BN2-3NNN-VGN	3,300	22	153	100-277VAC / 120-250VDC	4000K (neutral white)	Clear Polycarbonate	Circular
BPK-4BN2-6NNN-VGN	6,200	45	138	100-277VAC / 120-250VDC	4000K (neutral white)	Clear Polycarbonate	Circular
BPK-4UN2-3NNN-VGN	3,100	22	144	100-277VAC / 120-250VDC	4000K (neutral white)	Clear Polycarbonate	Ultra-Wide (Type 1)
<b>BPK-4UN2-6NNN-VGN</b>	6,200	45	138	100-277VAC / 120-250VDC	4000K (neutral white)	Clear Polycarbonate	Ultra-Wide (Type 1)
BPK-4BA2-5NNN-VGN	4,200	46	91	100-277VAC / 120-250VDC	Amber	Clear Polycarbonate	Circular
BPK-4UA2-5NNN-VGN	4,000	46	87	100-277VAC / 120-250VDC	Amber	Clear Polycarbonate	Ultra-Wide (Type 1)
<b>Pole Mount Battery Backup Models</b>							
BPK-4BCG-3NNN-VGF	3,300	25	132	230-240VAC	5000K (cool white)	Clear Polycarbonate	Circular
BPK-4BCG-6NNN-VGF	6,200	48	129	230-240VAC	5000K (cool white)	Clear Polycarbonate	Circular
BPK-4UCG-3NNN-VGF	3,100	25	124	230-240VAC	5000K (cool white)	Clear Polycarbonate	Ultra-Wide (Type 1)
BPK-4UCG-6NNN-VGF	6,200	48	129	230-240VAC	5000K (cool white)	Clear Polycarbonate	Ultra-Wide (Type 1)
BPK-4BNG-3NNN-VGF	3,300	25	132	230-240VAC	4000K (neutral white)	Clear Polycarbonate	Circular
BPK-4BNG-6NNN-VGF	6,200	48	129	230-240VAC	4000K (neutral white)	Clear Polycarbonate	Circular
BPK-4UNG-3NNN-VGF	3,100	25	124	230-240VAC	4000K (neutral white)	Clear Polycarbonate	Ultra-Wide (Type 1)
<b>BPK-4UNG-6NNN-VGF</b>	6,200	48	129	230-240VAC	4000K (neutral white)	Clear Polycarbonate	Ultra-Wide (Type 1)
BPA-4BAG-5NNN-VGF	4,200	49	86	230-240VAC	Amber	Clear Polycarbonate	Circular
BPK-4UAG-5NNN-VGF	4,000	49	82	230-240VAC	Amber	Clear Polycarbonate	Ultra-Wide (Type 1)
<b>BPK-6BGG-3NNN-VGG</b>	2,600	33	79	230-240VAC	Green	Domed Diffused	Circular

#### Zone 2, 22

Part Number	Fixture Lumens	Wattage	lm/W	Voltage	CCT	Lens	Beam Distribution
<b>Pole Mount Models</b>							
BPL-4BC2-3NNN-VGN	3,200	22	149	100-277VAC / 120-250VDC	5000K (cool white)	Clear Polycarbonate	Circular
BPL-4BC2-6NNN-VGN	6,700	45	149	100-277VAC / 120-250VDC	5000K (cool white)	Clear Polycarbonate	Circular
BPL-4UC2-3NNN-VGN	3,100	22	144	100-277VAC / 120-250VDC	5000K (cool white)	Clear Polycarbonate	Ultra-Wide (Type 1)
BPL-4UC2-6NNN-VGN	6,400	45	142	100-277VAC / 120-250VDC	5000K (cool white)	Clear Polycarbonate	Ultra-Wide (Type 1)
BPL-4BN2-3NNN-VGN	3,200	22	149	100-277VAC / 120-250VDC	4000K (neutral white)	Clear Polycarbonate	Circular
BPL-4BN2-6NNN-VGN	6,700	45	149	100-277VAC / 120-250VDC	4000K (neutral white)	Clear Polycarbonate	Circular
BPL-4UN2-3NNN-VGN	3,100	22	144	100-277VAC / 120-250VDC	4000K (neutral white)	Clear Polycarbonate	Ultra-Wide (Type 1)
<b>BPL-4UN2-6NNN-VGN</b>	6,400	45	142	100-277VAC / 120-250VDC	4000K (neutral white)	Clear Polycarbonate	Ultra-Wide (Type 1)
BPL-4BA2-5NNN-VGN	4,200	46	91	100-277VAC / 120-250VDC	Amber	Clear Polycarbonate	Circular
BPL-4UA2-5NNN-VGN	3,900	46	85	100-277VAC / 120-250VDC	Amber	Clear Polycarbonate	Ultra-Wide (Type 1)
<b>Pole Mount Battery Backup Models</b>							
BPL-4BCG-3NNN-VGF	3,200	25	128	230-240VAC	5000K (cool white)	Clear Polycarbonate	Circular
BPL-4BCG-6NNN-VGF	6,700	48	140	230-240VAC	5000K (cool white)	Clear Polycarbonate	Circular
BPL-4UCG-3NNN-VGF	3,100	25	124	230-240VAC	5000K (cool white)	Clear Polycarbonate	Ultra-Wide (Type 1)
BPL-4UCG-6NNN-VGF	6,400	48	133	230-240VAC	5000K (cool white)	Clear Polycarbonate	Ultra-Wide (Type 1)
BPL-4BNG-3NNN-VGF	3,200	25	128	230-240VAC	4000K (neutral white)	Clear Polycarbonate	Circular
BPL-4BNG-6NNN-VGF	6,700	48	140	230-240VAC	4000K (neutral white)	Clear Polycarbonate	Circular
BPL-4UNG-3NNN-VGF	3,100	25	124	230-240VAC	4000K (neutral white)	Clear Polycarbonate	Ultra-Wide (Type 1)
<b>BPL-4UNG-6NNN-VGF</b>	6,400	48	133	230-240VAC	4000K (neutral white)	Clear Polycarbonate	Ultra-Wide (Type 1)
BPL-4BAG-5NNN-VGF	4,200	49	86	230-240VAC	Amber	Clear Polycarbonate	Circular
BPL-4UAG-5NNN-VGF	3,900	49	80	230-240VAC	Amber	Clear Polycarbonate	Ultra-Wide (Type 1)
<b>BPL-6BGG-3NNN-VGG</b>	2,600	33	79	230-240VAC	Green	Domed Diffused	Circular


All values typical unless otherwise stated (tolerance +/- 10%).  
 2700k models available on request  
 44mm spigot entry option available  
 INMETRO models are indicated by 3rd character 'K' or 'L'

## Accessories




### BH-BRKT-SS-ADJ

- 316 stainless steel adjustable bracket kit




### BH-STMB-05-10-HD

- Aluminium stanchion mount, 5° up-tilt - 50mm pole




### BH-BRKT-A-KIT

- 316 stainless steel wall/ceiling flush mount bracket kit




### BH-STMB-25-10-HD

- Aluminium stanchion mount, 25° up-tilt - 50mm pole



### BH-BRKT-F-KIT

- 316 stainless steel wall/ceiling flush mount bracket kit




### BH-STMB-45-10-HD

- Aluminium stanchion mount, 45° up-tilt - 50mm pole



### BH-BRKT-LG-PF

- Aluminium pipe mount bracket kit - 50mm




### HZX-SPIGOT-34

- Aluminium wall mount spigot plate - 34mm



### H6XCAB72

- 72" stainless steel safety rope




### BH-WG-KIT


- Stainless steel wire guard kit

## Beam Distribution - Zone 1

Ultra-Wide Walkway (Type 1) - Clear

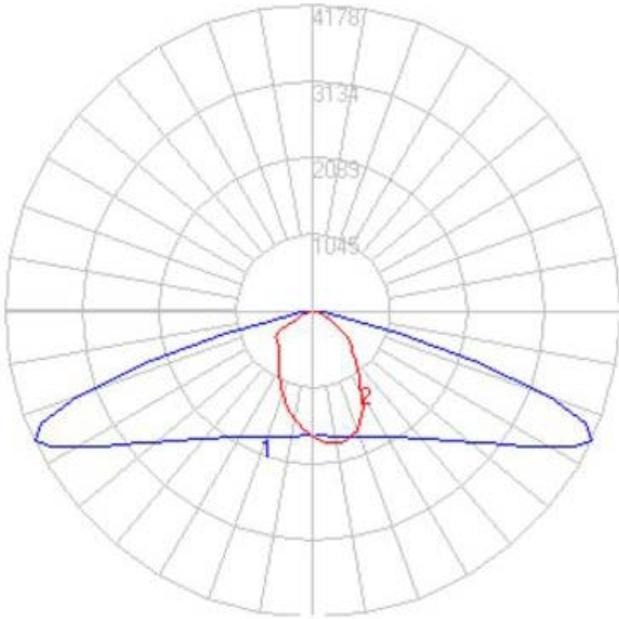


Circular - Clear

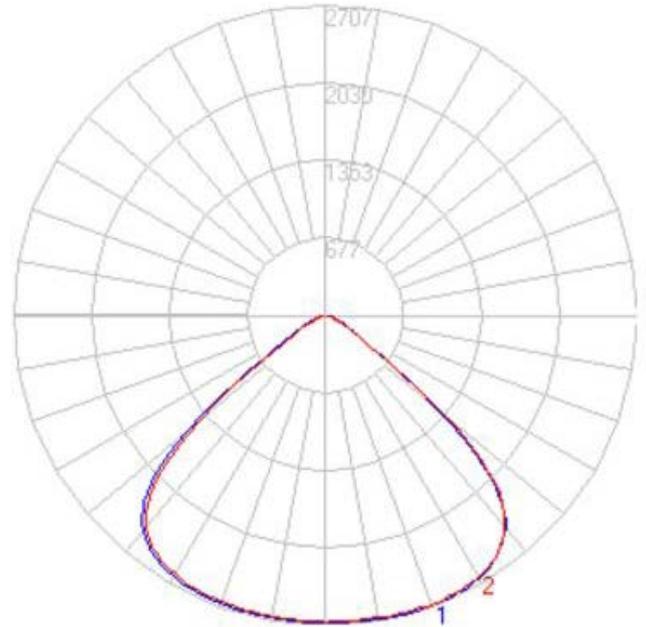


## Beam Distribution - Zone 2

Ultra-Wide Walkway (Type 1) - Clear

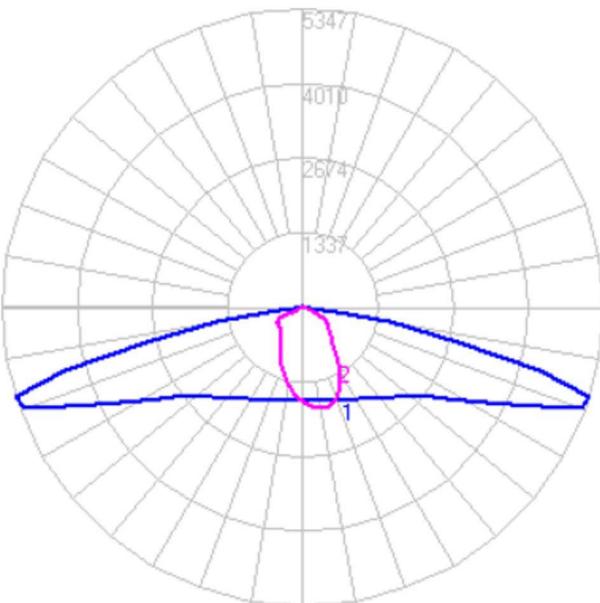


Circular - Clear

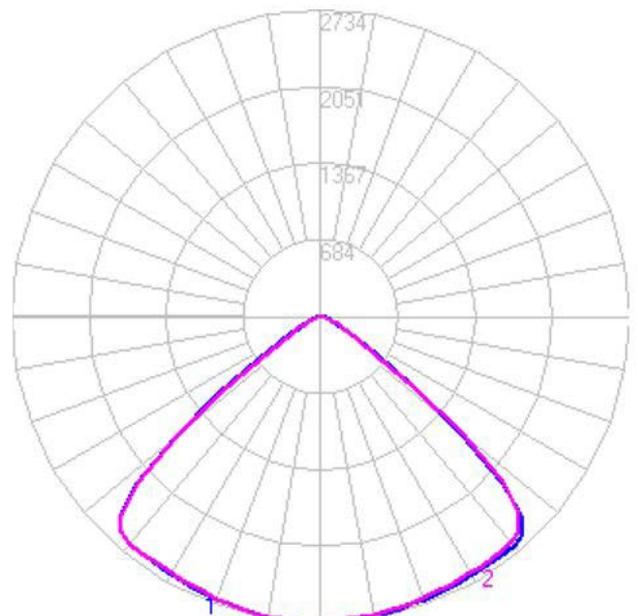

**DISCLAIMER.** All product information provided is, to the best of Dialight's knowledge, accurate as of the date of publication. When ordering, refer to [www.dialight.com](http://www.dialight.com) for current versions of: (a) relevant product documentation (including the relevant product data sheets); (b) Dialight terms and conditions of sale; and, (c) the relevant product warranty. To the extent that any contract is deemed formed between Dialight and the purchaser of Dialight products and/or an end-user, versions of documents available at [www.dialight.com](http://www.dialight.com) as at the date of sale shall be the versions incorporated therein. In the event of any discrepancy between this document or information provided at [www.dialight.com](http://www.dialight.com), the latter shall prevail.

## Thermal Roll-Off

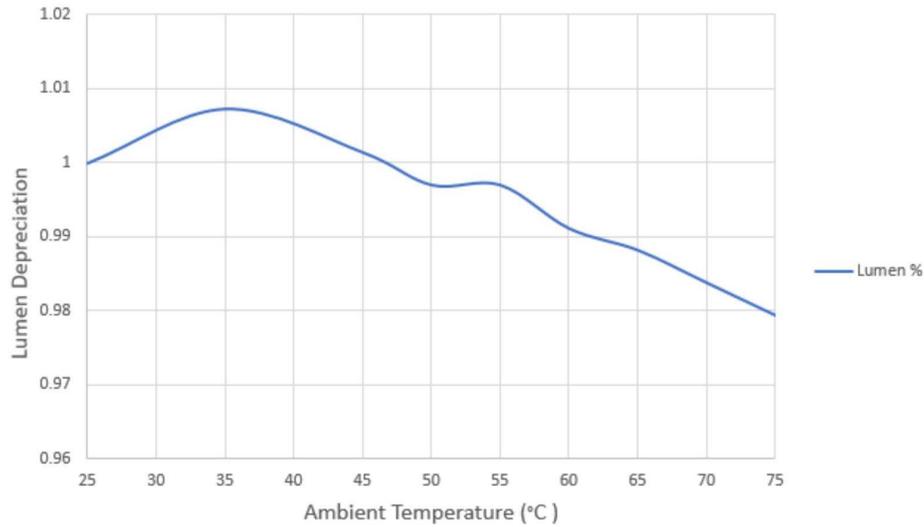

## Inrush Current / Circuit Breakers

Output	In rush (A) current @ input voltage							
	100 VAC	Duration (MS)	120 VAC	Duration (MS)	230 VAC	Duration (MS)	277 VAC	Duration (MS)
6,500	6	0.6	8	0.6	15	0.6	18	0.6
3,000	6	0.6	8	0.6	15	0.6	18	0.6

Output	GND Leakage (mA) input voltage			
	100 VAC	120 VAC	230 VAC	277 VAC
6,500	0.5	0.5	0.8	1.0
3,000	0.5	0.5	0.8	1.0

**DISCLAIMER.** All product information provided is, to the best of Dialight's knowledge, accurate as of the date of publication. When ordering, refer to [www.dialight.com](http://www.dialight.com) for current versions of: (a) relevant product documentation (including the relevant product data sheets); (b) Dialight terms and conditions of sale; and, (c) the relevant product warranty. To the extent that any contract is deemed formed between Dialight and the purchaser of Dialight products and/or an end-user, versions of documents available at [www.dialight.com](http://www.dialight.com) as at the date of sale shall be the versions incorporated therein. In the event of any discrepancy between this document or information provided at [www.dialight.com](http://www.dialight.com), the latter shall prevail.

# Lumen Maintenance Factor

Vigilant Bulkhead 6,500lm								
Ambient Temperature	Hours							
	0	15000	30000	45000	60000	75000	90000	100000
25°C	100%	98%	96%	95%	93%	92%	90%	90%
30°C	100%	98%	96%	95%	93%	92%	90%	90%
35°C	100%	98%	96%	95%	93%	92%	90%	90%
40°C	100%	98%	96%	95%	93%	92%	90%	90%
45°C	100%	98%	96%	95%	93%	92%	90%	90%
50°C	100%	97%	96%	95%	93%	92%	90%	89%
55°C	100%	97%	96%	95%	93%	92%	90%	89%
60°C	99%	97%	95%	94%	93%	91%	90%	89%
65°C	99%	97%	95%	94%	92%	91%	89%	89%

Based on 9,000 hour LM80 data

Vigilant Bulkhead 3,000lm								
Ambient Temperature	Hours							
	0	15000	30000	45000	60000	75000	90000	100000
25°C	100%	98%	96%	95%	93%	92%	90%	90%
30°C	100%	98%	96%	95%	93%	92%	90%	90%
35°C	100%	98%	96%	95%	93%	92%	90%	90%
40°C	100%	98%	96%	95%	93%	92%	90%	90%
45°C	100%	98%	96%	95%	93%	92%	90%	90%
50°C	100%	97%	96%	95%	93%	92%	90%	89%
55°C	100%	97%	96%	95%	93%	92%	90%	89%
60°C	99%	97%	95%	94%	93%	91%	90%	89%
65°C	99%	97%	95%	94%	92%	91%	89%	89%


Based on 9,000 hour LM80 data

**DISCLAIMER.** All product information provided is, to the best of Dialight's knowledge, accurate as of the date of publication. When ordering, refer to [www.dialight.com](http://www.dialight.com) for current versions of: (a) relevant product documentation (including the relevant product data sheets); (b) Dialight terms and conditions of sale; and, (c) the relevant product warranty. To the extent that any contract is deemed formed between Dialight and the purchaser of Dialight products and/or an end-user, versions of documents available at [www.dialight.com](http://www.dialight.com) as at the date of sale shall be the versions incorporated therein. In the event of any discrepancy between this document or information provided at [www.dialight.com](http://www.dialight.com), the latter shall prevail.


# Dimming Curves

## DALI Dimming

6,500lm

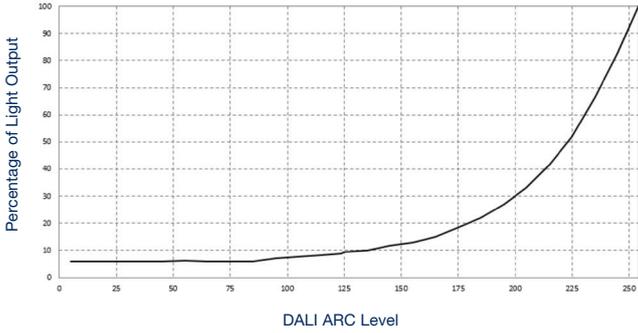


3,000lm

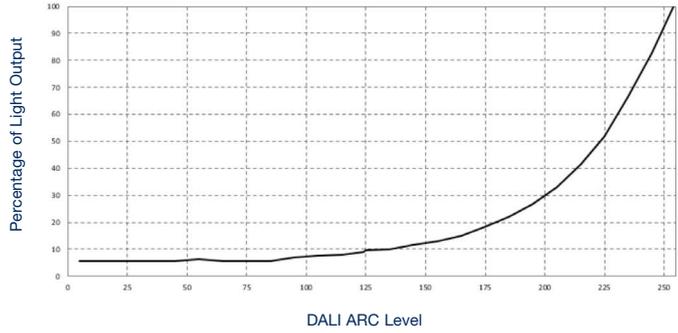


## 0-10V Dimming

6,500lm

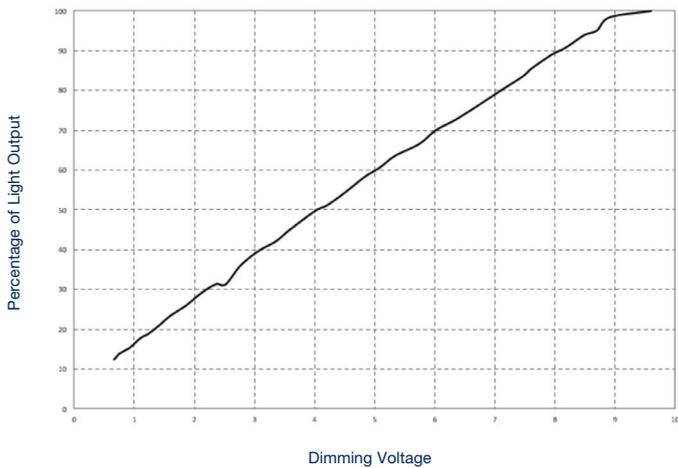

3,000lm

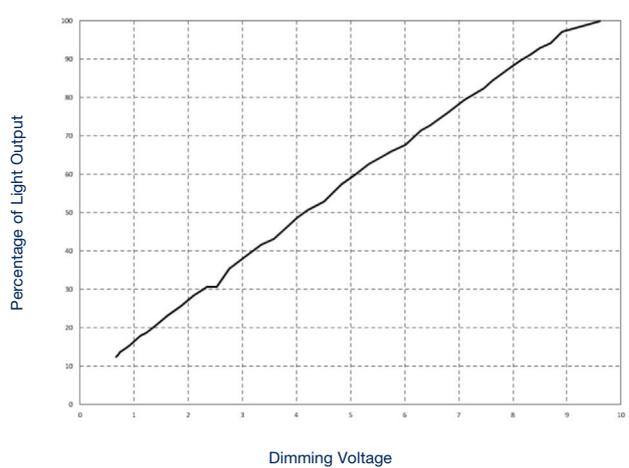

**DISCLAIMER.** All product information provided is, to the best of Dialight's knowledge, accurate as of the date of publication. When ordering, refer to [www.dialight.com](http://www.dialight.com) for current versions of: (a) relevant product documentation (including the relevant product data sheets); (b) Dialight terms and conditions of sale; and, (c) the relevant product warranty. To the extent that any contract is deemed formed between Dialight and the purchaser of Dialight products and/or an end-user, versions of documents available at [www.dialight.com](http://www.dialight.com) as at the date of sale shall be the versions incorporated therein. In the event of any discrepancy between this document or information provided at [www.dialight.com](http://www.dialight.com), the latter shall prevail.

**WARNING / DISCLAIMERS:**

**Installation & secondary retention.** The use of this product without proper installation (including secondary retention / netting) and periodic inspections, could cause severe injury or death. Dialight recommends that all installations should use secondary retention / netting (appropriate to the installation environment) as applicable. Dialight products are intended for ultimate purchase, installation and operation by knowledgeable persons trained in the functional assessment, installation, use and maintenance of such products and all customers (including but not limited to end customers) are responsible for assessing the suitability of Dialight products for any given installation requirement. It is the exclusive responsibility of the contractor, installer and/or end-user to: (a) determine the suitability of the product for its intended application; and, (b) ensure that the product is safely installed (with secondary retention / netting as appropriate) and in compliance with all applicable laws and regulations.

**Product specifications & warranties.** All product information provided is, to the best of Dialight's knowledge, accurate as of the date of publication. All values and performance data herein are design or typical values when measured under laboratory conditions. The information herein is subject to change without notice. The products / software detailed herein are subject to applicable warranties and terms and conditions of use/purchase. Unless agreed otherwise in writing by an authorized representative of Dialight, Dialight does not represent that its products are fit for any particular purpose and accepts no liability for the installation and/or unauthorised use of its products. When ordering, refer to [www.dialight.com](http://www.dialight.com) for current versions of: (a) relevant product documentation (including relevant product data sheets); (b) Dialight terms and conditions of sale; and, (c) the relevant product warranties. To the extent that any contract is deemed formed between Dialight and the purchaser of Dialight products and/or an end-user, versions of documents available at [www.dialight.com](http://www.dialight.com) as at the date of sale shall be the versions incorporated therein. In the event of any discrepancy between this document and information provided at [www.dialight.com](http://www.dialight.com), the latter shall prevail.

**Exclusion of liability.** To the extent permissible under the relevant law, Dialight disclaims all liability for personal injury and/or other damage resulting from any dislodgment or other dislocation of its products. Whilst Dialight has used its reasonable endeavours to ensure the completeness and accuracy of information herein, Dialight does not assume any liability for damages resulting from use of this information or for any third-party representations made in relation to Dialight products.